Vishay Spectrol



Model 18 (PR2) 22.2 mm Diameter, 15 Turn Dial



FEATURES





Compact-requires minimal panel space (22.2 mm diameter requirement)


RoHS


Revision: 09-Nov-06


- For use with precision potentiometers or other rotating devices, up to 15 turns
- Designed for metal shaft
- High force "Click Brake"
- · Black color on request

| MECHANICAL SPECIFICATIONS | |
|--------------------------------|---|
| Accepts shaft diameter | 6.35 mm (0.250 in.)/6 mm/3.17 mm (0.125 in.)/3 mm |
| Number of turns | 0 to 15 |
| Dial division | 50 per turn |
| Torque with brake engaged | 5 oz-in. (350 gr cm) min. |
| Markings | Black or satin chrome |
| Weight | 15 gr. |
| Set srew | UNC 2-56 |
| Hex key size | 1.27 mm (0.05 in.) |
| Bushing extension beyond panel | 6.35 mm (0.250 in.) maximum |
| Shaft extension beyond panel | 18.1 mm (0.710 in.) minimum |
| | 22.2 mm (0.875 in.) maximum |

DIMENSIONS in millimeters (inches)

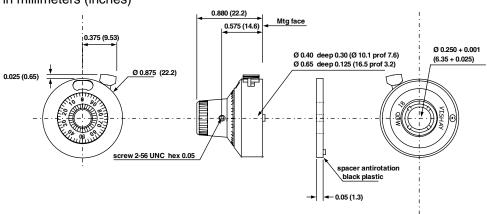

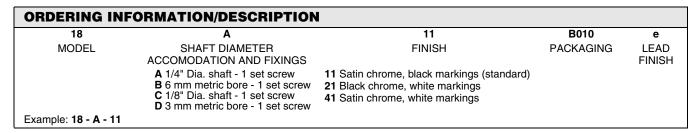



For technical questions, contact: sfer@vishay.com Document Number: 57078

Legal Disclaimer Notice



Vishay

Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

www.vishay.com Revision: 08-Apr-05